


## Demi Seat Installation Instruction - 41200240050

Please give the manual to the end user.  
Please read the manual thoroughly before installation.



Bolts (2), Washers (2), Nuts (2) are supplied.

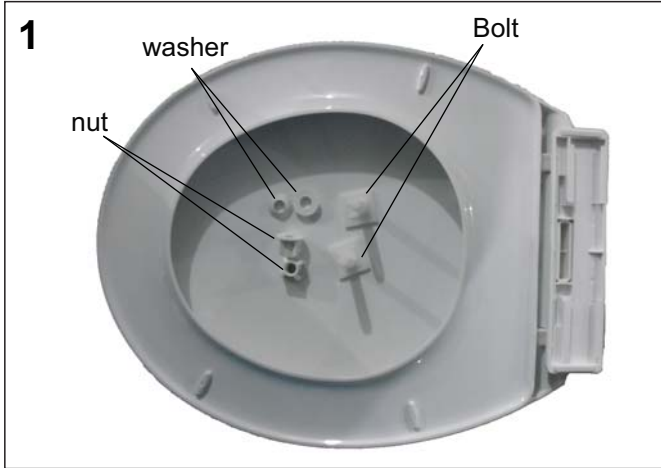

Push the 2 bolts into the slide track at the end of the seat.



Insert the 2 bolts into fixing holes of the pan.



Adjust the seat so that it fits well.



Underneath the pan attach the washers and nuts.




Once the seat and pan match, fully tighten the nut.

# Demi Cistern Fittings

41200240060

The flush and inlet valves have been preset for a standard 3L/6L flush. Install as shown in the diagram.

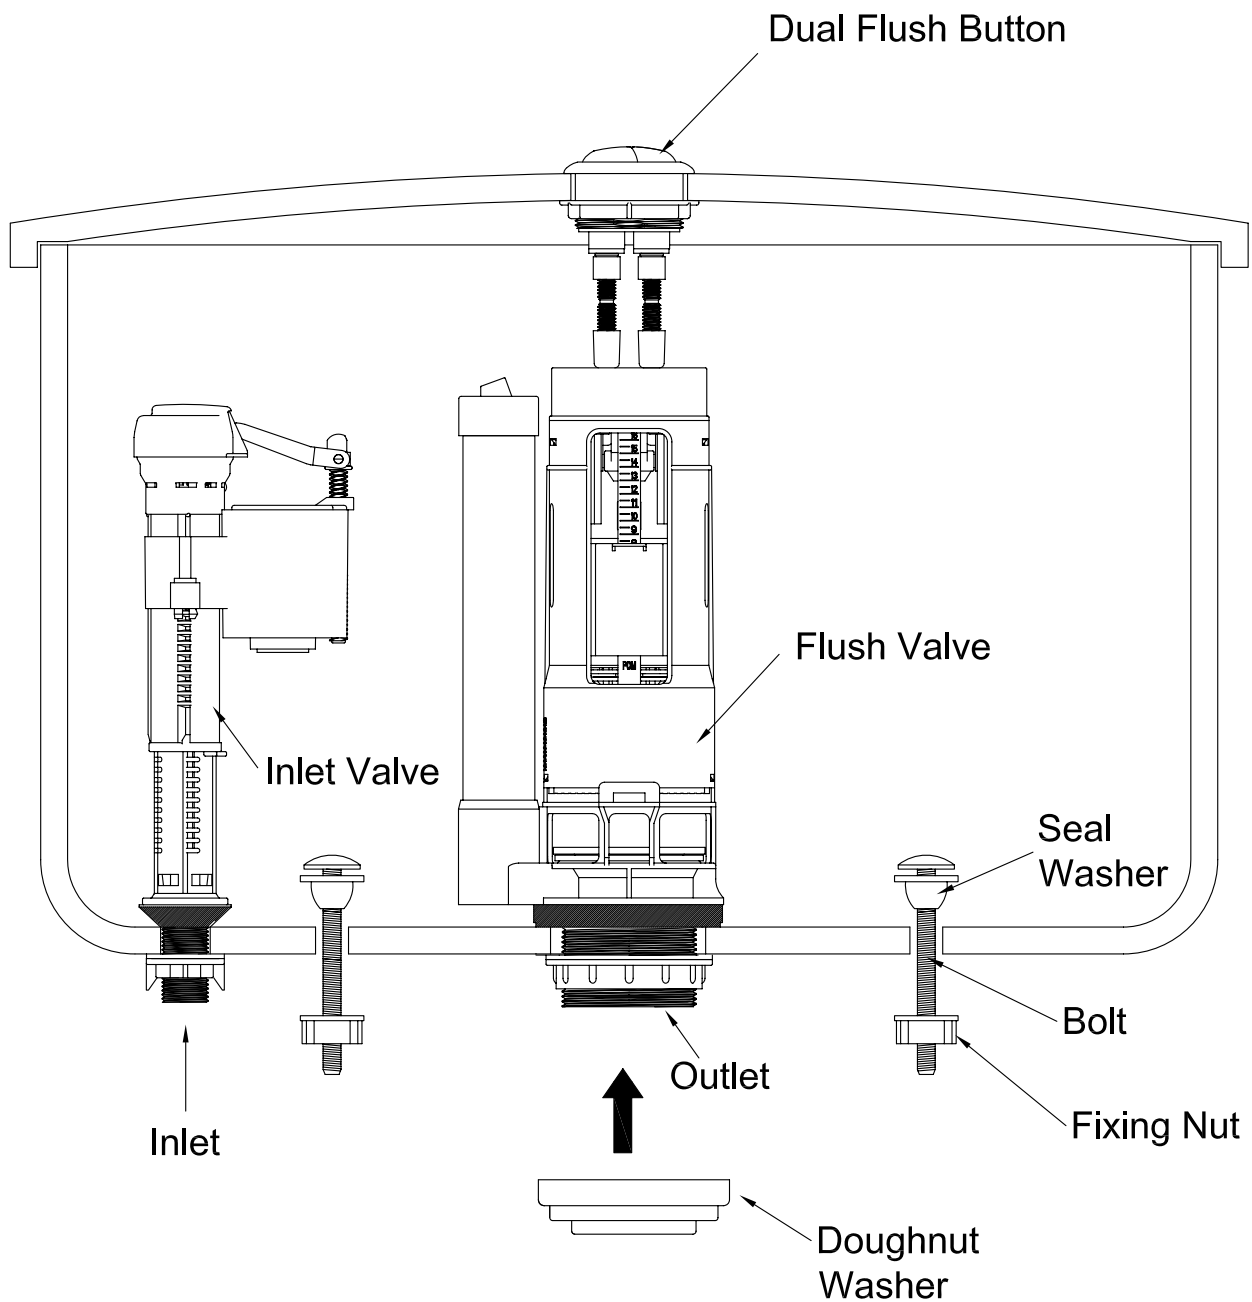

When the cistern is fitted to the pan the rear naturally tapers towards to the top. The WC should be installed with the cistern sitting like this on the pan. Do not push the pan up against the wall tilting the cistern forward as this can affect the WC's function.

